



# 6-Pin DIP Optoisolator Transistor Output

The MOC8100 device consists of a gallium arsenide infrared emitting diode optically coupled to a monolithic silicon phototransistor detector. It is designed for applications requiring higher output collector current ( $I_C$ ) with lower input drive current ( $I_F$ ).

- Current Transfer Ratio Guaranteed to be > 50% at 1 mA LED Drive Level
- **To order devices that are tested and marked per VDE 0884 requirements, the suffix "V" must be included at end of part number. VDE 0884 is a test option.**

### Applications

- Appliances, Measuring Instruments
- General Purpose Switching Circuits
- Programmable Controllers
- Portable Electronics
- Interfacing and coupling systems of different potentials and impedances
- Low Power Logic Circuits
- Telecommunications Equipment

### MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
--------	--------	-------	------

#### INPUT LED

Reverse Voltage	$V_R$	6	Volts
Forward Current — Continuous	$I_F$	60	mA
LED Power Dissipation @ $T_A = 25^\circ\text{C}$ with Negligible Power in Output Detector Derate above $25^\circ\text{C}$	$P_D$	120	mW
		1.41	mW/ $^\circ\text{C}$

#### OUTPUT TRANSISTOR

Collector–Emitter Voltage	$V_{CEO}$	30	Volts
Emitter–Base Voltage	$V_{EBO}$	7	Volts
Collector–Base Voltage	$V_{CBO}$	70	Volts
Collector Current — Continuous	$I_C$	150	mA
Detector Power Dissipation @ $T_A = 25^\circ\text{C}$ with Negligible Power in Input LED Derate above $25^\circ\text{C}$	$P_D$	150	mW
		1.76	mW/ $^\circ\text{C}$

#### TOTAL DEVICE

Isolation Surge Voltage <sup>(1)</sup> (Peak ac Voltage, 60 Hz, 1 sec Duration)	$V_{ISO}$	7500	Vac(pk)
Total Device Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	250 2.94	mW mW/ $^\circ\text{C}$
Ambient Operating Temperature Range <sup>(2)</sup>	$T_A$	-55 to +100	$^\circ\text{C}$
Storage Temperature Range <sup>(2)</sup>	$T_{stg}$	-55 to +150	$^\circ\text{C}$
Soldering Temperature (10 sec, 1/16" from case)	$T_L$	260	$^\circ\text{C}$

1. Isolation surge voltage is an internal device dielectric breakdown rating.


For this test, Pins 1 and 2 are common, and Pins 4, 5 and 6 are common.

2. Refer to Quality and Reliability Section in Opto Data Book for information on test conditions.

GlobalOptoisolator is a trademark of Motorola, Inc.


**MOC8100**  
[CTR = 50% Min]

### STYLE 1 PLASTIC



STANDARD THRU HOLE  
CASE 730A-04

### SCHEMATIC



- PIN 1. LED ANODE  
2. LED CATHODE  
3. N.C.  
4. EMITTER  
5. COLLECTOR  
6. BASE

# MOC8100

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted)<sup>(1)</sup>

Characteristic	Symbol	Min	Typ <sup>(1)</sup>	Max	Unit
<b>INPUT LED</b>					
Forward Voltage (I <sub>F</sub> = 10 mA)	V <sub>F</sub>	—	1.15	1.4	Volts
T <sub>A</sub> = 0–70°C		—	1.3	—	
T <sub>A</sub> = –55°C		—	1.05	—	
Reverse Leakage Current (V <sub>R</sub> = 6 V)	I <sub>R</sub>	—	0.05	10	μA
Capacitance (V = 0 V, f = 1 MHz)	C <sub>J</sub>	—	18	—	pF

## OUTPUT TRANSISTOR

Collector–Emitter Dark Current (V <sub>CE</sub> = 5 V, T <sub>A</sub> = 25°C) (V <sub>CB</sub> = 30 V, T <sub>A</sub> = 70°C)	I <sub>CEO</sub>	—	3	25	nA
	I <sub>CEO</sub>	—	0.05	50	μA
Collector–Base Dark Current (V <sub>CB</sub> = 5 V)	I <sub>CBO</sub>	—	0.2	10	nA
Collector–Emitter Breakdown Voltage (I <sub>C</sub> = 1 mA)	V <sub>(BR)CEO</sub>	30	45	—	Volts
Collector–Base Breakdown Voltage (I <sub>C</sub> = 100 μA)	V <sub>(BR)CBO</sub>	70	100	—	Volts
Emitter–Base Breakdown Voltage (I <sub>E</sub> = 100 μA)	V <sub>(BR)EBO</sub>	7	7.8	—	Volts
DC Current Gain (I <sub>C</sub> = 1 mA, V <sub>CE</sub> = 5 V) (Typical Value)	h <sub>FE</sub>	—	600	—	—
Collector–Emitter Capacitance (f = 1 MHz, V <sub>CE</sub> = 0)	C <sub>CE</sub>	—	7	—	pF
Collector–Base Capacitance (f = 1 MHz, V <sub>CB</sub> = 0)	C <sub>CB</sub>	—	19	—	pF
Emitter–Base Capacitance (f = 1 MHz, V <sub>EB</sub> = 0)	C <sub>EB</sub>	—	9	—	pF

## COUPLED

Output Collector Current (I <sub>F</sub> = 1 mA, V <sub>CE</sub> = 5 V) (I <sub>F</sub> = 1 mA, V <sub>CE</sub> = 5 V, T <sub>A</sub> = 0 to +70°C)	I <sub>C</sub> (CTR) <sup>(2)</sup>	0.5 (50) 0.3 (30)	1 (100) 0.6 (60)	— —	mA (%)
Collector–Emitter Saturation Voltage (I <sub>C</sub> = 100 μA, I <sub>F</sub> = 1 mA)	V <sub>CE(sat)</sub>	—	0.22	0.5	Volts
Turn–On Time (I <sub>C</sub> = 2 mA, V <sub>CC</sub> = 10 V, R <sub>L</sub> = 100 Ω) <sup>(3)</sup>	t <sub>on</sub>	—	9	20	μs
Turn–Off Time (I <sub>C</sub> = 2 mA, V <sub>CC</sub> = 10 V, R <sub>L</sub> = 100 Ω) <sup>(3)</sup>	t <sub>off</sub>	—	7	20	μs
Rise Time (I <sub>C</sub> = 2 mA, V <sub>CC</sub> = 10 V, R <sub>L</sub> = 100 Ω) <sup>(3)</sup>	t <sub>r</sub>	—	3.8	—	μs
Fall Time (I <sub>C</sub> = 2 mA, V <sub>CC</sub> = 10 V, R <sub>L</sub> = 100 Ω) <sup>(3)</sup>	t <sub>f</sub>	—	5.6	—	μs
Isolation Voltage (f = 60 Hz, t = 1 sec) <sup>(4)</sup>	V <sub>ISO</sub>	7500	—	—	Vac(pk)
Isolation Resistance (V = 500 V) <sup>(4)</sup>	R <sub>ISO</sub>	10 <sup>11</sup>	—	—	Ω
Isolation Capacitance (V = 0 V, f = 1 MHz) <sup>(4)</sup>	C <sub>ISO</sub>	—	0.2	2	pF

1. Always design to the specified minimum/maximum electrical limits (where applicable).
2. Current Transfer Ratio (CTR) = I<sub>C</sub>/I<sub>F</sub> × 100%.
3. For test circuit setup and waveforms, refer to Figure 11.
4. For this test, Pins 1 and 2 are common, and Pins 4, 5 and 6 are common.

TYPICAL CHARACTERISTICS

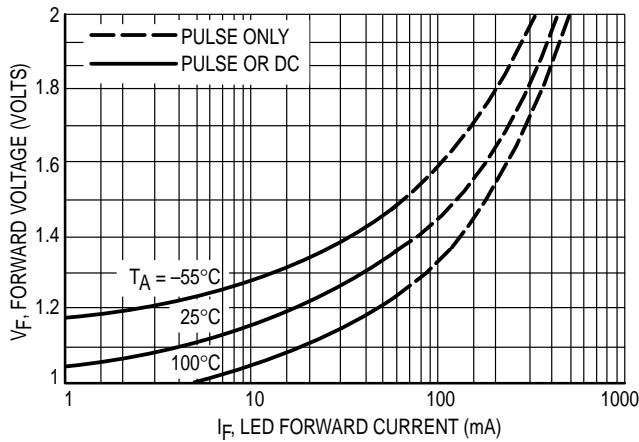


Figure 1. LED Forward Voltage versus Forward Current

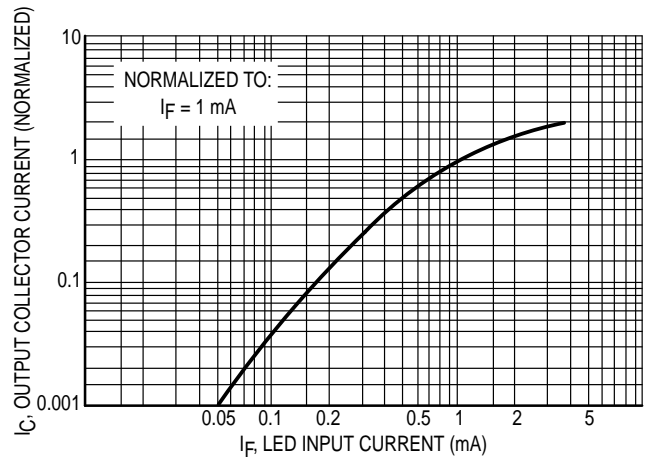


Figure 2. Output Current versus Input Current

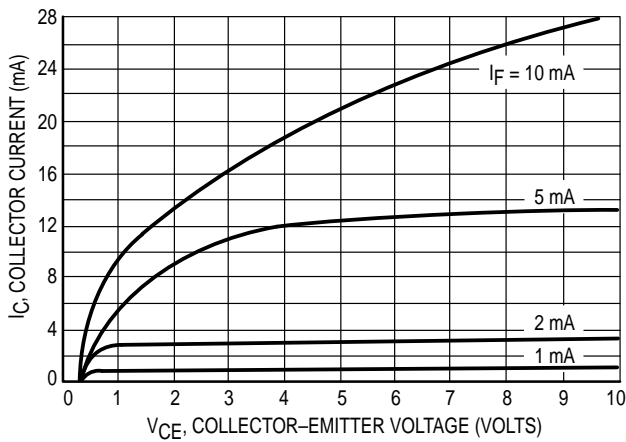


Figure 3. Collector Current versus Collector-Emitter Voltage

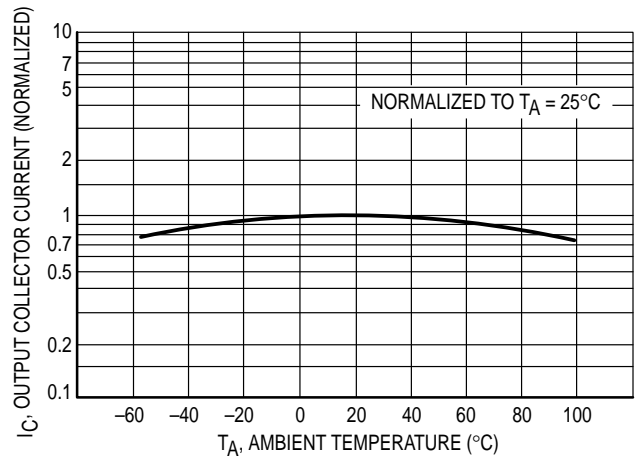


Figure 4. Output Current versus Ambient Temperature

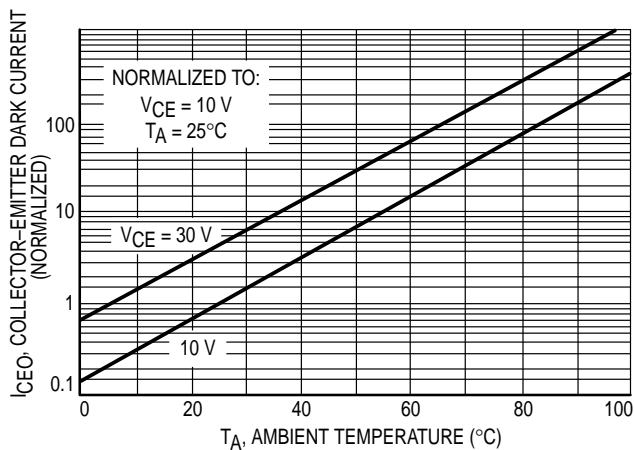


Figure 5. Dark Current versus Ambient Temperature

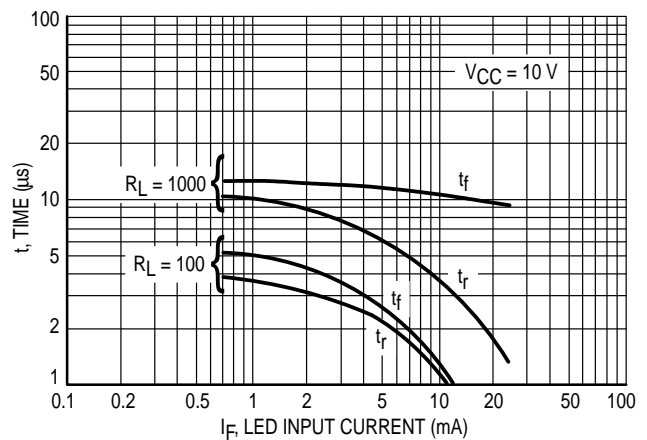


Figure 6. Rise and Fall Times (Typical Values)

# MOC8100

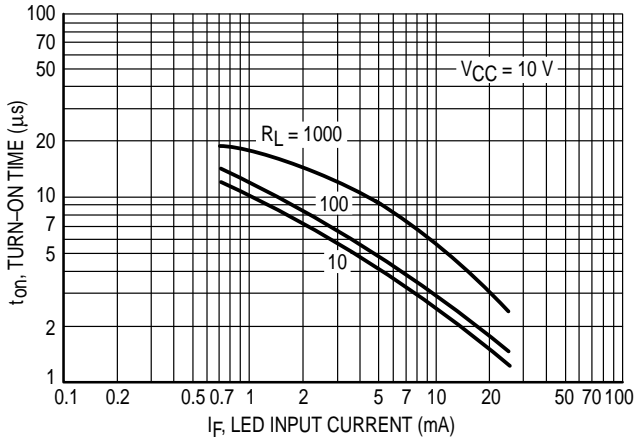


Figure 7. Turn-On Switching Times

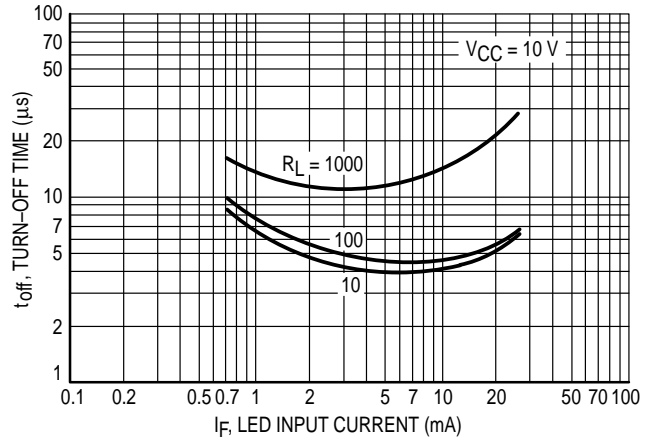


Figure 8. Turn-Off Switching Times

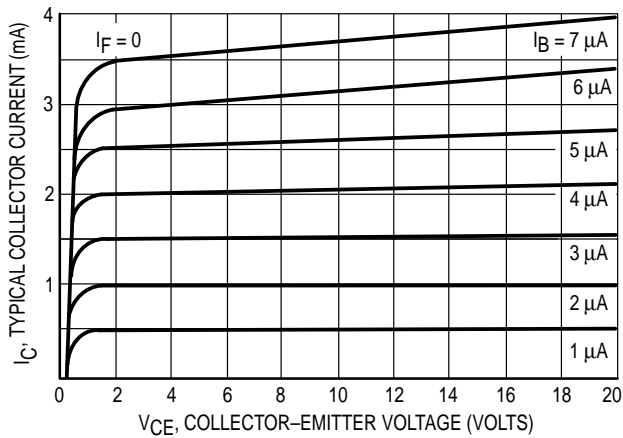


Figure 9. DC Current Gain (Detector Only)

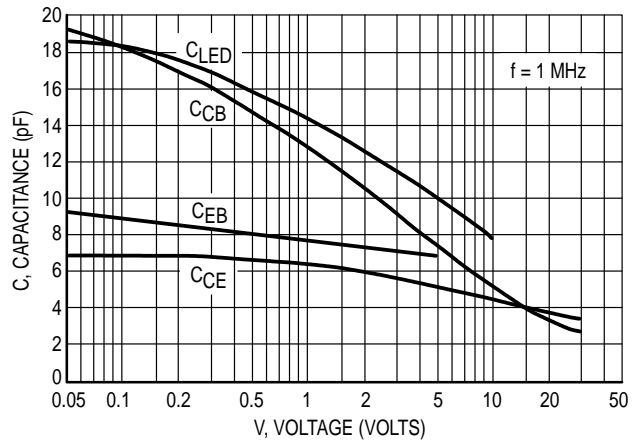


Figure 10. Capacitances versus Voltage



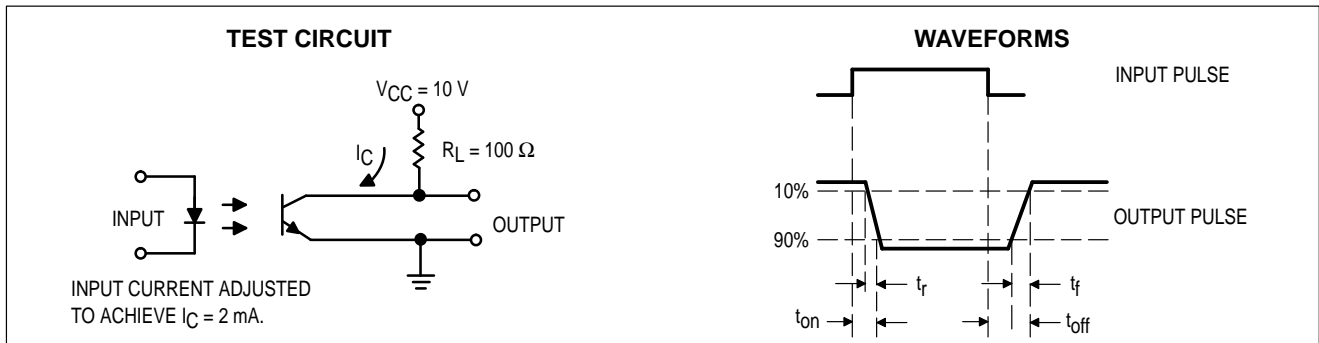


Figure 11. Switching Time Test Circuit and Waveforms

PACKAGE DIMENSIONS

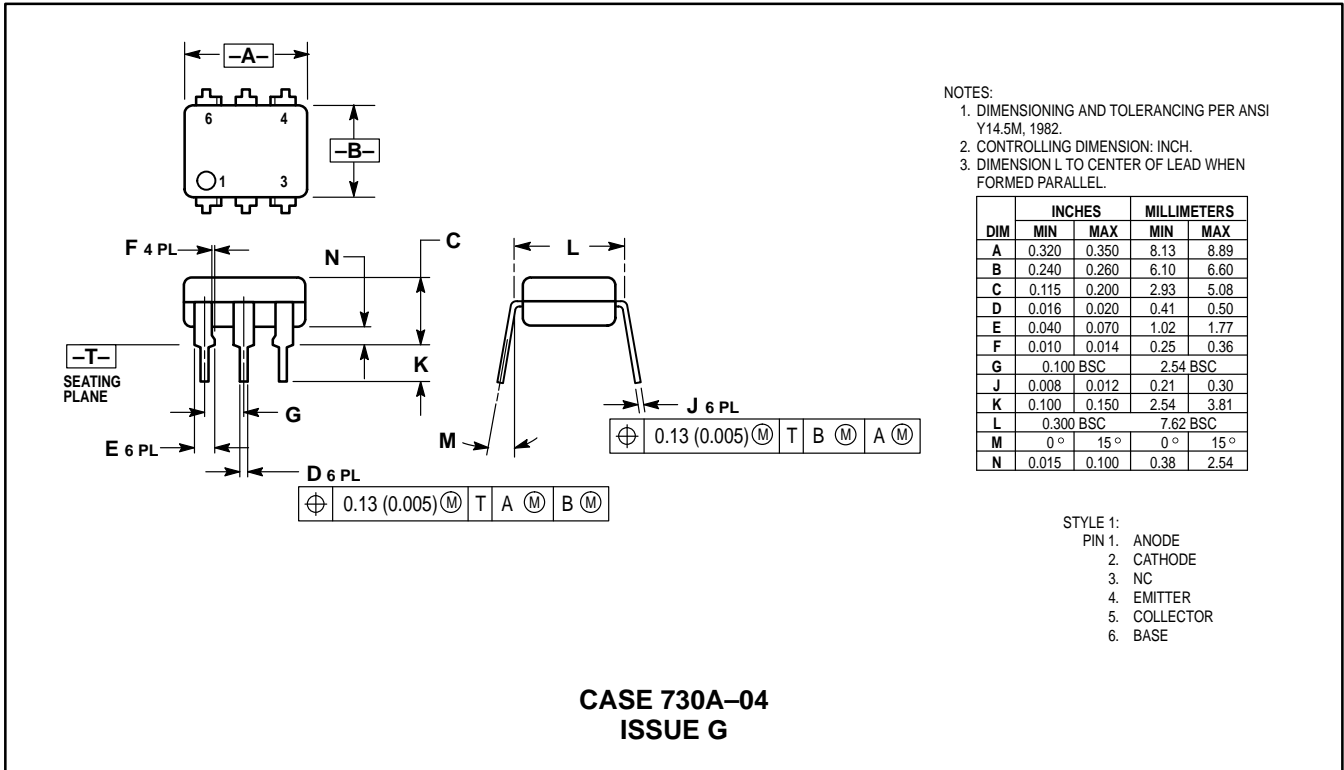

# MOC8100

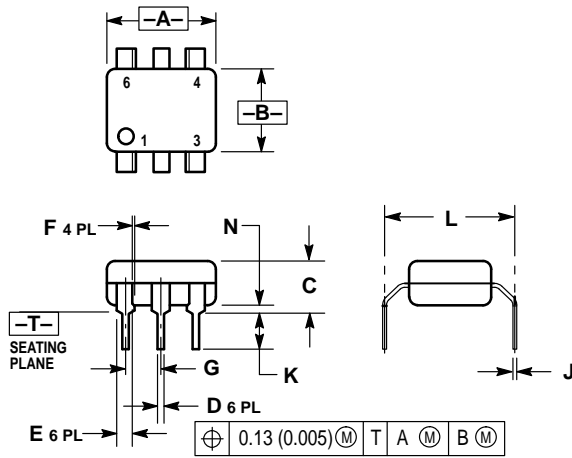

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: INCH.
  3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.320	0.350	8.13	8.89
B	0.240	0.260	6.10	6.60
C	0.115	0.200	2.93	5.08
D	0.016	0.020	0.41	0.50
E	0.040	0.070	1.02	1.77
F	0.010	0.014	0.25	0.36
G	0.100 BSC		2.54 BSC	
J	0.008	0.012	0.21	0.30
K	0.100	0.150	2.54	3.81
L	0.400	0.425	10.16	10.80
N	0.015	0.040	0.38	1.02

**\*Consult factory for leadform option availability**

**CASE 730D-05  
ISSUE D**

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

**How to reach us:**

**USA / EUROPE:** Motorola Literature Distribution;  
P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447

**JAPAN:** Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, Toshikatsu Otsuki,  
6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

**MFAX:** RMFAX0@email.sps.mot.com - TOUCHTONE (602) 244-6609  
**INTERNET:** http://Design-NET.com

**HONG KONG:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

